

SUCTION HOSE


7962 – CLEAR BRAIDED PVC

ASSEMBLIES WITH MALE & FEMALE NPSH THREADED COUPLINGS



1-1/2" X 20'	7962-150X20MF
2" X 20'	7962-2X20MF
2-1/2" X 20'	7962-250X20MF
3" X 20'	7962-3X20MF
4" X 20'	7962-4X20MF
6" X 20'	7962-6X20MF

ASSEMBLIES WITH MALE & FEMALE CAM LOCK COUPLINGS

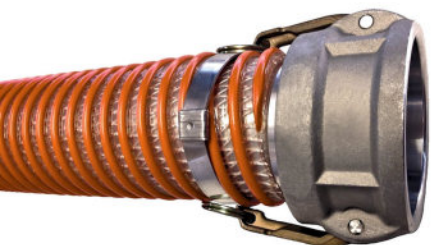

1-1/2" X 20'	7962-150X20CE
2" X 20'	7962-2X20CE
2-1/2" X 20'	7962-250X20CE
3" X 20'	7962-3X20CE
4" X 20'	7962-4X20CE
6" X 20'	7962-6X20CE

SPIRAL BOLT CLAMPS AVAILABLE
HOSE HELIX IS CLOCKWISE

FOR ASSEMBLIES WITH FEMALE CAM X MALE NPT:
REPLACE THE CE IN ABOVE PART NUMBER WITH CN

ALSO AVAILABLE WITH BALL & SOCKET COUPLINGS

100 FT MAX ROLL THROUGH 6"

BULK HOSE

-10 TO +140 DEG F

SIZE (ID)	ITEM NUMBER	PSI RATING	LBS / FOOT
1-1/2"	7962-150	100	0.49
2"	7962-200	100	0.75
3"	7962-300	100	1.19
4"	7962-400	75	1.80

SIZE (ID)	ITEM NUMBER	PSI RATING	LBS / FOOT
5"	7962-500	70	3.00
6"	7962-600	70	3.95
8"	7962-800	70	5.60
10"	7962-010	40	8.75

CLEAR WALL FOR VISUAL INSPECTION • CORRUGATED COVER FOR FLEXIBILITY

- BRAIDED REINFORCEMENT FOR DURABILITY AND INCREASED PSI RATING
- FULL VACUUM RATING IN ALL SIZES (AT AMBIENT TEMPERATURE)

WORKING PRESSURE & VACUUM RATING DECREASE AS TEMPERATURE INCREASES

PSI RATING LISTED IS THE RECOMMENDED MAX OPERATING PRESSURE OF THE BULK HOSE ONLY
HOSE ASSEMBLY WORKING PRESSURE RATING IS DEPENDENT ON THE COUPLING TYPE